

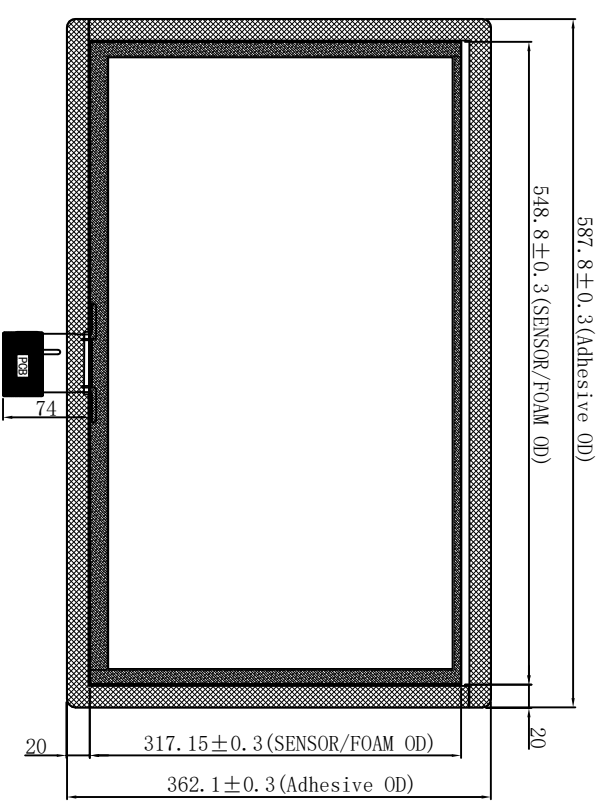
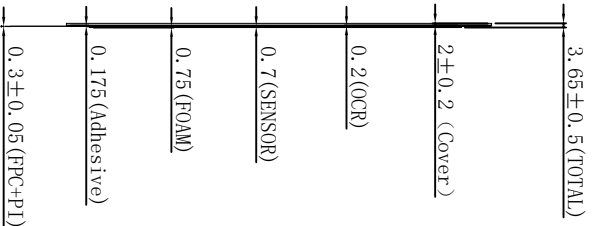


No ROHS hazardous material


Ordinal	Modify content description	Cartographer/date of change
Δ		
Δ		

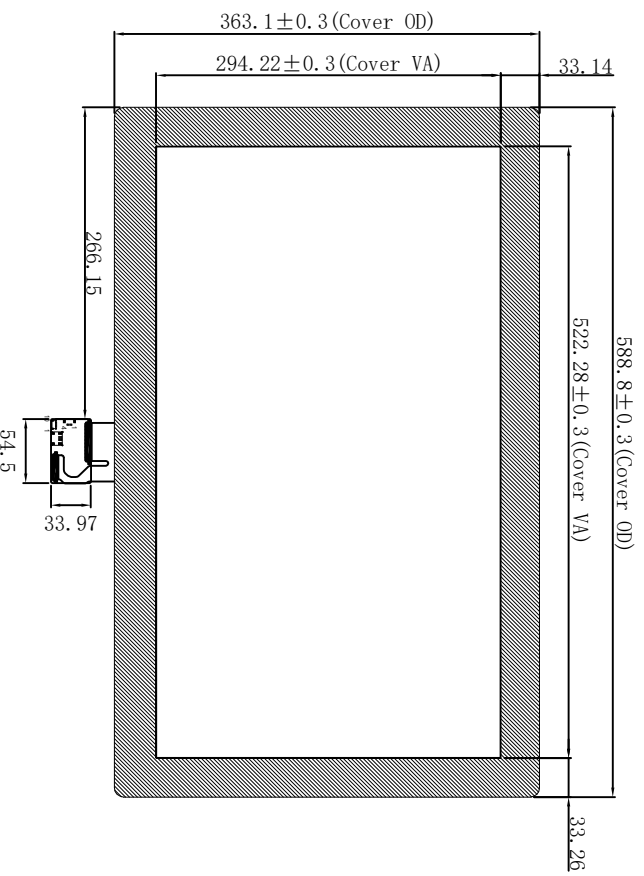

Screen printing area: Print Black



Frame adhesive foam area = 0.75mm



Frame adhesive area = 0.175mm

Front view

Side view


Back view

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC Solutions:	ILI2510	9. Surface hardness:	≥6H
4. Impact Resistance:	30.0Φ/0.8 Steel Ball 1138g/0.8m/s=60cm/11mm	10. Operate :	-20℃~+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance	as±0.5

USB(4PIN)

PIN	Definition
1	VCC
2	D-
3	D+
4	GND

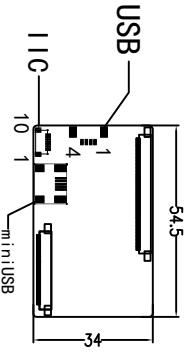

PCB Board SCALE 3:1



杭州宏梟科技有限公司  
Grahwolet Technology CO., Ltd

Model	Version	Designer	Approved	Direction	Date	Unit
HX2361801	V1.0	LU0	HBZ	2018-7-19	2018-7-21	MM

View	Unit
Proportion	1:1